


Delay / Disruption Tolerant Networking Enhancements for Streaming Data

Tom Rich / Pete Gonzalez

May 8, 2017




Agenda



- Delay / Disruption Tolerant Networking (DTN)
- Opportunities for DTN Enhancement
- DTN BSS Payload Conditioning
- bss_player Stream Control Application
- Demo Setup, Re-use Elements
- JSC / JPL DTN / DSN Overview
- DTN BSS Telemetry Demo
- BSS Player Video Architecture
- DTN BSS Video Demo
- Summary




Delay / Disruption Tolerant Networking (DTN)



- DTN provides store-and-forward data transmission.
 - Missing data is automatically detected and re-transmitted.
 - Data is held at the origination node until receipt confirmation is received from the destination node.
- DTN is delay tolerant.
 - DTN is designed for transmission delays at interplanetary distances
 - Up to 20 minutes transmission delay for a Mars mission
- NASA's Spacecraft Communications and Navigation (SCaN) Program Office has directed that DTN be incorporated into the Deep Space Network.
- Therefore, the MCC will need to account for the effects of DTN on data received from the DSN.
- This work addresses operational enhancements to the Interplanetary Overlay Network (ION).




Opportunities for DTN Enhancement



- Situation: An unconditioned DTN data stream produces out-of-order data, as missing data frames are re-transmitted and mixed in with the real-time data stream.
 - Out-of-order data would look like a transient glitch on a flight controller display.
 - A data gap would be preferable to out-of-order data.
 - This problem *is* addressed by the Bundle Streaming Service (BSS) bundled with ION.
 - However, the data samples are delivered in bursts due to DTN (LTP) aggregation.
 - This presents a problem for applications that rely on a steady stream of samples, such as voice and video.
 - A way to meter the data is needed.
- Situation: The user needs to know when 100% of the data has been received. Delay Tolerant Payload Conditioning (DTPC) does do this. This work uses a different approach.
- Situation: For timing sensitive applications, such as H.264 compressed video, the 100% complete received data stream timing should match the original timing, even though the original data samples may have been aggregated into larger blocks for space-to-ground transmission.
- All three of these streams are required simultaneously over the Licklider Transmission Protocol (LTP), which is DTN's long haul space-to-ground (aggregating) protocol.
- All of these situations are addressed by DTN BSS Payload Conditioning.





DTN BSS Payload Conditioning



- DTN BSS Payload Conditioning provides:
 - A metered real-time data stream
 - Monotonically increasing time tags and sequence numbers, no out-of-order packets, may have gaps
 - Metering; timing of the output data stream matches the original, even though aggregation may have occurred during space-to-ground transmission.
 - Real-time metering will be important for transmission of voice over DTN.
 - A fully conditioned data stream
 - 100% confirmed reception; real-time data advancement when 100% is reached
 - A metered, fully conditioned data stream
 - Suitable for H.264 compressed video; lags behind real-time
- These capabilities require:
 - (Minimal) modification to the DTN bpsend() function to add a unique sequence number and a microsecond time tag to the DTN ECOS extension block
 - Modification to the ION DTN Bundle Streaming Service (BSS) library to add these two new parameters to the BSS database
 - The bss_player data stream control application
 - All three types of streams are available simultaneously
 - bss_player can distribute each stream independently over BP, UDP, or multicast




bss_player Stream Control Application

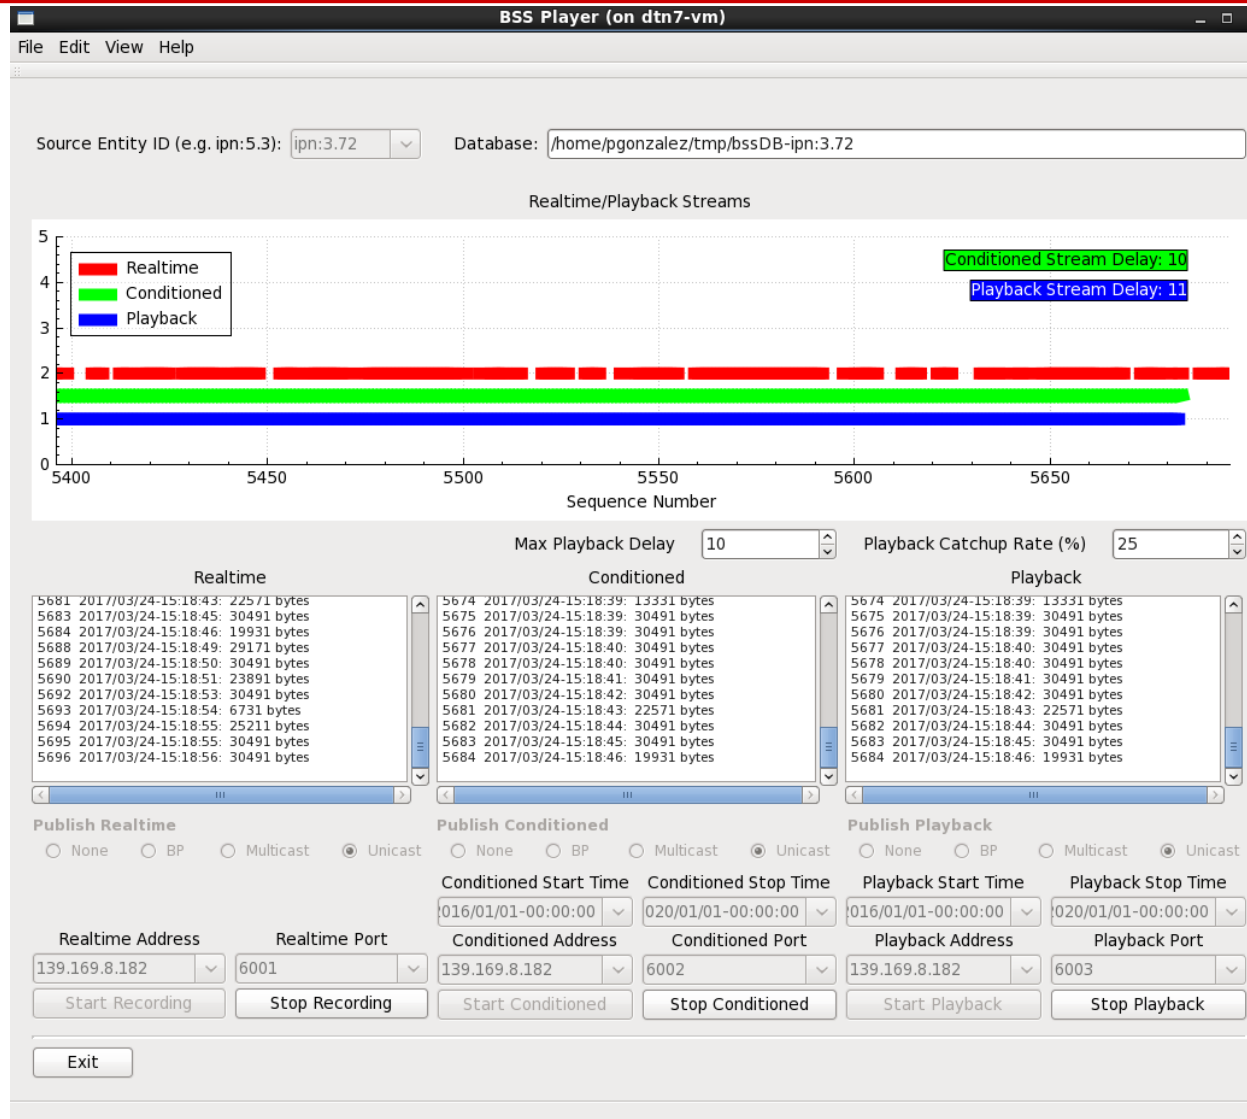





Demo Setup, Re-use Elements



- A DTN node in the iPAS lab, JSC Bldg. 29 simulates the vehicle transmission point.
- The simulated Deep Space Operations Center (DSOC) at JPL anchors the DTN LTP space-to-ground link.
- JPL models the space link with a 2 sec. one-way-light-time (OWLT) delay, and a 2% frame drop rate on the downlink.
- JPL provides the multi-center DTN distribution node.
- The OTF in JSC Bldg. 30 provides five independent DTN data reception nodes.
 - Their sole connectivity is through JPL
 - This configuration simulates geographically dispersed control centers



JSC / JPL DTN / DSN Overview

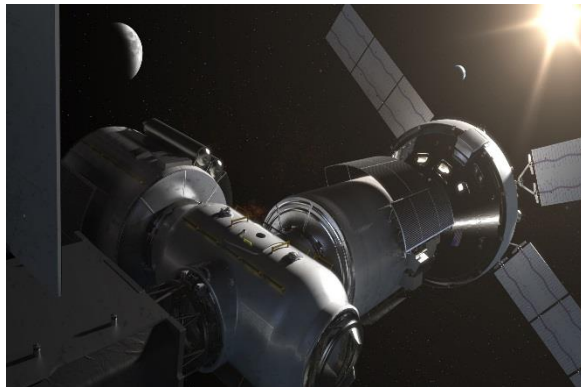

Initial Cislunar Habitat
Software Defined Radio
iPAS Lab, JSC Bldg. 29

DTN / LTP
Telemetry, Voice,
Video Downlink

DTN / LTP
Command, Voice
Uplink



Protocol Test Lab@JPL
DSN Operations Center Sim
Space-to-Ground Comm Link Sim
2 sec. one way light time delay
2% frame drop rate on the downlink
0.1% frame drop rate on the uplink
Available 24 / 7 / 365

UDP, STCP, DGR
DTN Convergence Layers




PTL@JPL



OTF@JSC Bldg. 30





DTN BSS Telemetry Demo



- bss_player, showing metered realtime, 100% conditioned, and metered replay data streams
- Sample telemetry display of metered realtime stream (**red**)
 - Skipped sequence numbers are evident, indicating missing data.
 - Sequence numbers monotonically increase




BSS Player Video Architecture

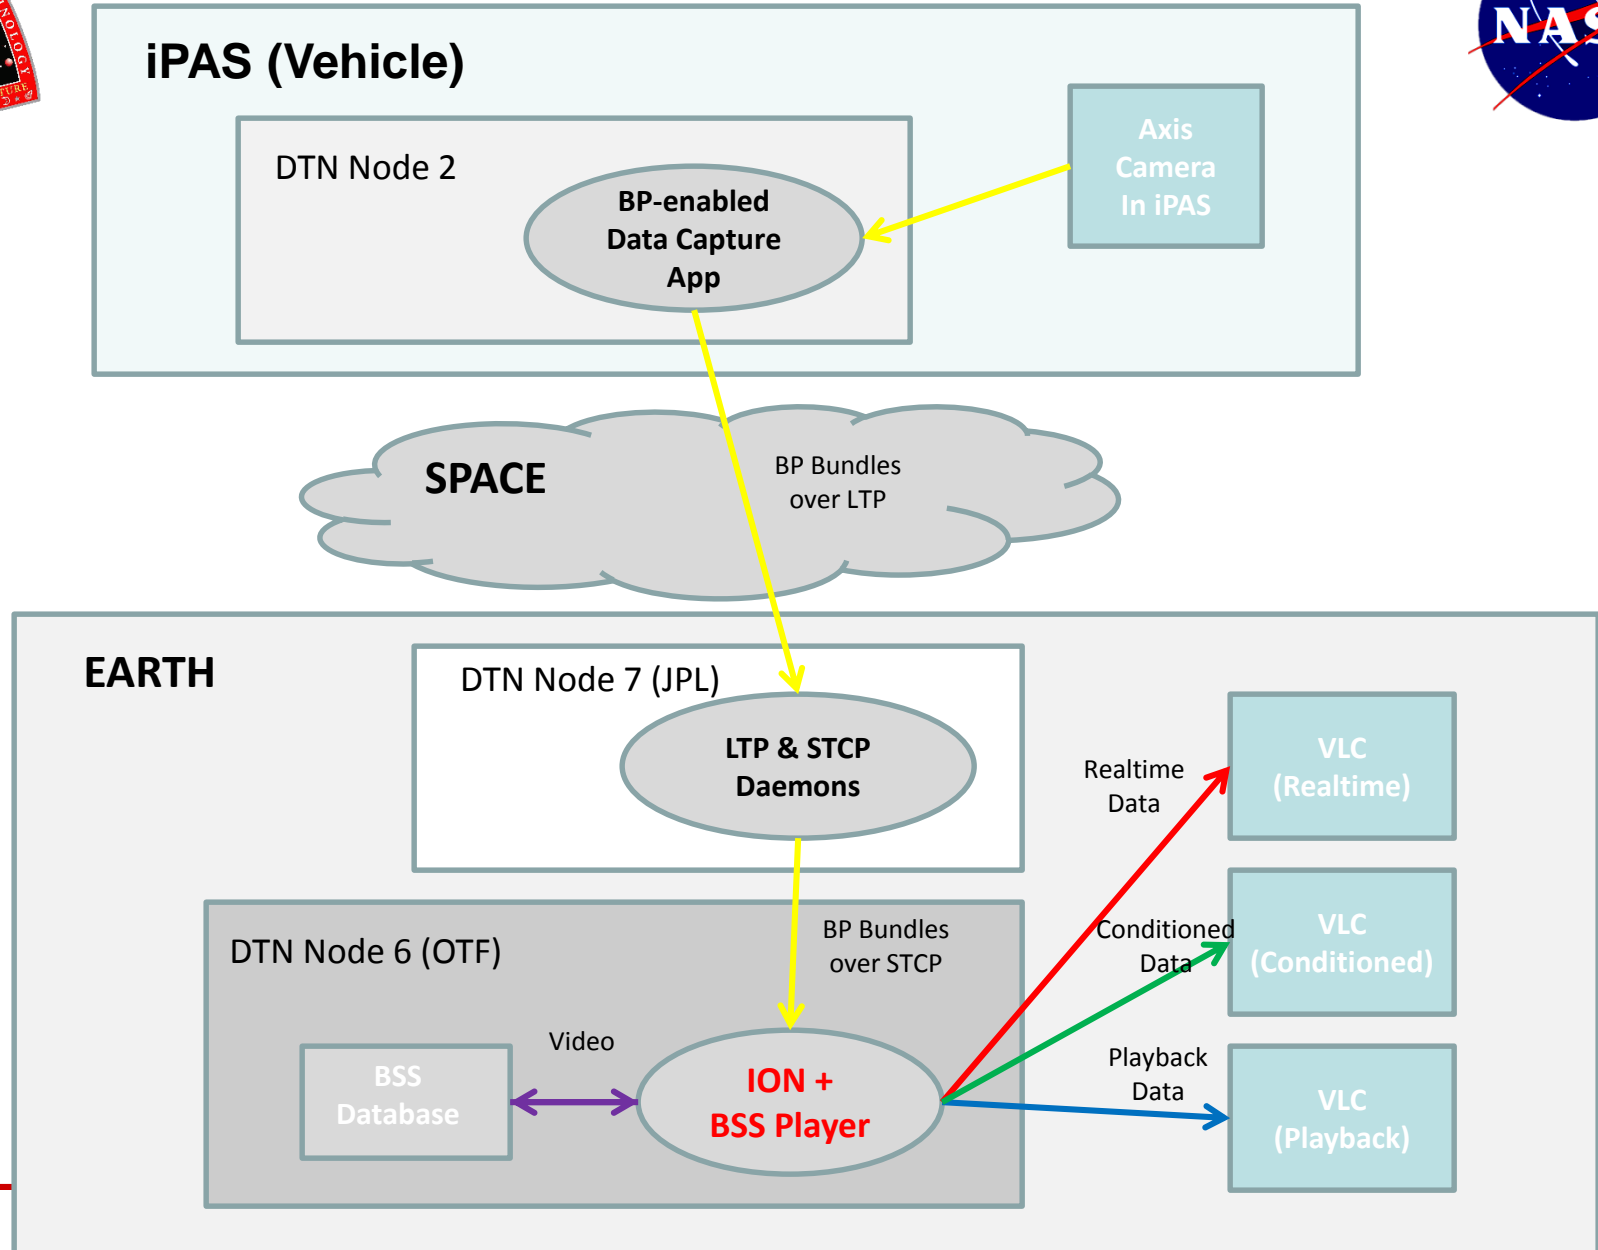




DTN BSS Video Demo



- bss_player, showing metered realtime, 100% conditioned, and replay data streams
- Video display of original low-def 4 fps Motion JPEG video signal, provided by an Axis 214 PTZ camera in the iPAS Pathfinder lab in Bldg. 29
- Video display of metered BSS realtime signal (**red**), propagated through the JSC / JPL DTN / DSN simulated space-to-ground and ground-to-ground network
 - Video glitches correspond to dropped MJPG frames.
 - Real-time received video lags the original by ~2 sec., the modeled OWLT
- Video display of real-time 100% conditioned DTN video signal (**green**)
 - Video freezes while bss_player waits for retransmission of missing data.
 - When all missing data are restored, the video jumps to the most current frame.
 - Intervening video is skipped; events will be missed.
- Video display of metered replay 100% conditioned DTN video signal (**blue**)
 - Smoothly displays the complete video signal
 - Lags behind real-time




Summary



- DTN Bundle Streaming Service (BSS) addresses the problem of out-of-order data in real-time displays.
 - DTN BSS Payload Conditioning includes this capability. Plus, it adds metering capability to the real-time stream, so that the output timing matches the input timing.
- DTN BSS Payload Conditioning addresses the need to confirm reception of 100% of the data transmitted over DTN, and to know real-time when 100% reception has occurred.
- DTN BSS Payload Conditioning addresses the need to match the output data timing to the input timing for the fully conditioned data stream.
 - Important for timing sensitive data streams such as H.264 compressed video




Questions?





Backup





DTN Voice Communication Architecture

